

消防产品系列 Fire Fighting Series

手提式空气泡沫枪装置

Portable Foam Applicators

PQ8.C手提式空气泡沫枪装置根据IMO《国际消防安全系统规则》要求设计制造，使用6%氟蛋白的泡沫灭火剂。产品经中国船级社型式认可和检验。

PQ8.C Portable Foam Applicators are designed and manufactured according to IMO 《International Code For Fire Safety Systems》. It is designed to contain 6% Fluor protein foam fire extinguishers. The product has been certificated and checked by CCS.



工厂代码 JH12-1
Factory Code

PQ8.C空气泡沫枪(不锈钢)


PQ8.C Foam Nozzle (Stainless steel)



工厂代码 JH12-2
Factory Code

20L泡沫液桶(不锈钢)

20L Foam Liquid Bucket(Stainless steel)

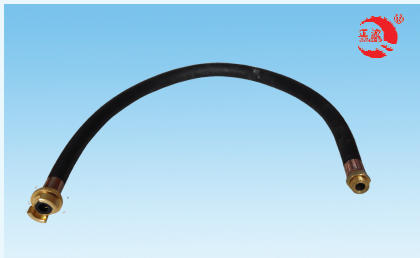

工厂代码 JH12-3
Factory Code

输液管

Output Tube

国际编码 IMPA Code	工厂代码 Factory Code	型号 Type	使用工作压力 MPa Working Pressure MPa	混合液量 L/min Mixed Liquid Volume L/min	泡沫液量 m3/min Foam Liquid Volume m3/min	射程 m Range m	包装数量 Package No.	重量 kg Weight kg	包装尺寸 cm Package Dimension cm
331076	JH12-1 JH12-4	PQ8.C PQ8.C(E)	0.2~0.5	400	1.5	15	1只 1 Piece	5	52.5 × 19 × 18
	JH12-2 (不锈钢)	泡沫液桶 20L Foam					2只 2 Piece	14.5	49 × 35 × 53.5
	JH12-5 (塑料)	Liquid Bucket 20L					1只	3	37 × 22 × 47



工厂代码 JH12-1
Factory Code

PQ8.C空气泡沫枪(不锈钢)

C Foam Nozzle (Stainless steel)



工厂代码 JH12-2
Factory Code

20L沫液桶(塑料)

20L Foam Liquid Bucket(Plastic)

流 量: Foam solution flow rate: 8 ± 10%L/S
工作压力: Minimum working pressure: 0.25MPa
泡沫筒: Foam tank.PVC 容积V: 20L

射 程: Mni mum dischar ge distance: 20m
发泡倍数: Nominal foam expansion ratio 6.5:1